

Multimastic FB

Firestop Board

- Multimastic FB1, single-sided coating
- Multimastic FB2, double-sided coating



Product Data Sheet

MULCOL
INTERNATIONAL

Multimastic FB

Firestop Board

- Multimastic FB1, single-sided coating
- Multimastic FB2, double-sided coating



Fire resistance
≤ 240 minutes



Working life
25 years



Paintable
After 24 hours

Firestop Board

Multimastic FB 1 and Multimastic FB2 are firestop boards made of a high-density stone wool core, treated with Multimastic C firestop coating on one or both sides. Multimastic FB firestop boards make it possible to seal off larger openings, creating a fire-resistant and smoke-proof seal to adjacent rooms.

Multimastic FB firestop boards form part of the Mulcol® Penetration Seal System. Multimastic FB firestop boards can also be used in combination with the Multimastic SP firestop mastic and Multimastic C firestop coating.

Advantages

- ✓ Fire resistance ≤ 240 minutes
- ✓ CE-certified
- ✓ Easy to install
- ✓ Environmentally and user-friendly
- ✓ No lining required in the case of plasterboard partitions
- ✓ Permanently flexible

Applications

- ✓ CLT (wooden) and rigid floors
- ✓ CLT (wooden) and rigid walls
- ✓ Light partitions
- ✓ Opening size walls: max. 1500 x 2500 mm (wxh), 3 m²
- ✓ Opening size floors: max. 1200 mm x 1200 mm;
max. 9000 x 900 mm

Technical data

Colour	White surface, green core
Application temperature	+5 °C to +50 °C
Temperature resistance	-30 °C to +80 °C
Density	~ 160 kg/m ³
Reaction to fire	Class E in accordance with EN 13501-1

Packaging

	Panel thickness	Dimensions	Pallet	Article number
Multimastic FB1	50 mm	1000 x 625 mm	60 pieces	204001051
Multimastic FB2	60 mm	1000 x 625 mm	50 pieces	204001062



Technical documents available

- ✓ Product Data Sheet (PDS)
- ✓ Technical Data Sheet (TDS)
- ✓ Safety Data Sheet (SDS)
- ✓ Installation Manual
- ✓ CE certificate
- ✓ Emission reports
- ✓ Acoustic report

Approvals

- ✓ Tested in accordance with EN 1366-3
- ✓ Classification in accordance with EN 13501-2
- ✓ Certified in accordance with EAD 350454-00-1104
- ✓ Tested in accordance with NEN 6075 (Smoke-resistance)
- ✓ ETA report 23/0050
- ✓ Declaration of Performance (DoP)

The above documents are available from your Mulcol contact or via www.mulcol.com

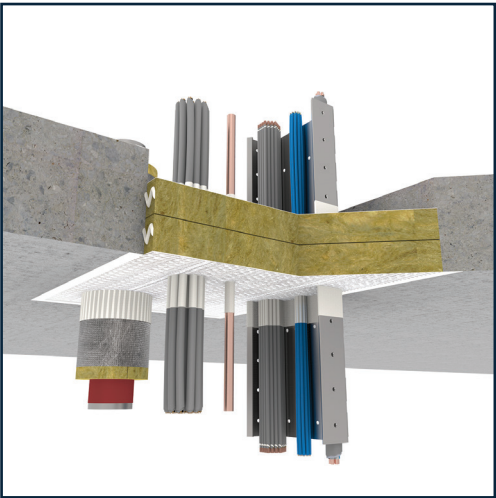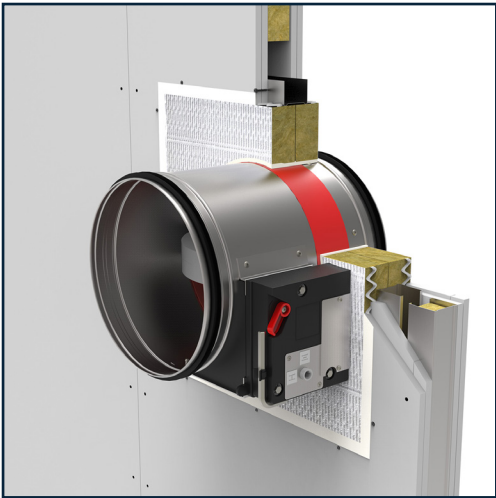

Multimastic FB -PDS- GB | v4 | 11/2024 | Mulcol International | Promenade 75 | 5041 GM | Uden | The Netherlands



