

Multimortar

Firestop Mortar



Product Data Sheet

MULCOL
INTERNATIONAL

Multimortar

Firestop Mortar



Fire resistance
≤ 240 minutes



Acoustic insulation
Rw 37 dB



Working life
30 years



Recoatable
After 4 hours

Firestop Mortar

Composed of perlite and non-organic compounds, Multimortar is a dry white powder that when mixed with water creates a durable, thermally insulating and fire-resistant mass. When used to seal openings in walls or floors, it prevents the spread of fire and smoke through fire-resistant structures, while maintaining their acoustic properties.

Multimortar is part of the Mulcol® Penetration Seal System. The Multimortar can be used in combination with the Multicollar Slim, Multidisc, Multiwrap, Multitherm Bandage and Multimastic FB firestop boards.

Advantages

- ✓ Fire resistance ≤ 240 minutes
- ✓ CE-certified
- ✓ High acoustic insulation
- ✓ Easy to install
- ✓ Smooth finish
- ✓ Suitable for most surfaces
- ✓ Hardened less than 1 hour

Applications

- ✓ Rigid walls and floors
- ✓ Flexible walls
- ✓ Cable trays, cable ladders, electric cables and cable bundles
- ✓ Plastic pipes up to Ø 40 mm without fire collar
- ✓ Plastic pipes up to Ø 160 mm with fire collar or wrap
- ✓ Multilayer pipes with or without insulation
- ✓ Metal pipes up to Ø 324 mm with elastomeric or rock wool insulation
- ✓ Finishing around fire dampers
- ✓ Gas pipes, drinkpipes, electrical room services etc.
- ✓ Blank seals

Technical data

Colour	Off-white
Shelf life	Indefinitely if kept in an unopened bag in a dry place above +5 °C
Application temperature	0 °C to +40 °C
Temperature resistance	-20 °C to +70 °C
Hardened	Less than 1 hour, depending on the local climate
VOC content	< 1 g/L
Reaction to fire	A1 in accordance with EN 13501-1

www.mulcol.com

MULCOL
INTERNATIONAL

Packaging

	Contents	Pallet	Pallet	Article number
Bag	15 kilos	60 bags	900 kilos	209001020

Usage (mixing ratio 2:1)

Approximately 3.42 bags per m² (with a thickness of 50 mm)
 Approximately 6.83 bags per m² (with a thickness of 100 mm)



Technical documents available

- ✓ Product Data Sheet (PDS)
- ✓ Technical Data Sheet (TDS)
- ✓ Safety Data Sheet (SDS)
- ✓ Installation Manual
- ✓ CE certificate
- ✓ Emission reports
- ✓ Acoustic report

Approvals

- ✓ Tested in accordance with EN 1366-3
- ✓ Classification in accordance with EN 13501-2
- ✓ Certified in accordance with EAD 350454-00-1104
- ✓ Tested in accordance with NEN 6075 (Smoke-resistance)
- ✓ ETA report 23/0057
- ✓ Declaration of Performance (DoP)

The above documents are available from your Mulcol contact or via www.mulcol.com

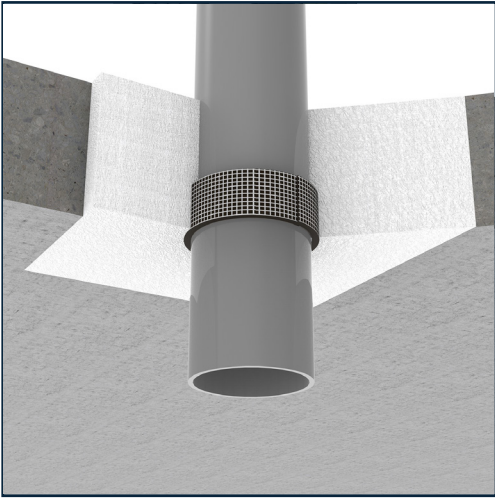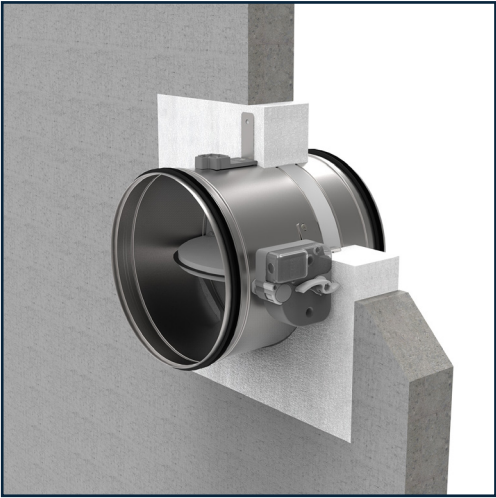

Multimorlar-PDS-GB | v4 | 11/2024 | Mulcol International | Promenade 75 | 5041 GM | Uden | The Netherlands



