

Multiwrap

Fire Wrap



Product Data Sheet

MULCOL
INTERNATIONAL

Multiwrap

Fire Wrap



Fire resistance
≤ 240 minutes



Working life
25 years

Fire wrap

Multiwrap is a graphite-based wrap on a roll, for the fire-resistant sealing of combustible pipes and insulation. The Multiwrap provides a fire-resistant seal to adjacent rooms. Multiwrap reacts to heat and it seals openings caused by the melting of plastic pipes or combustible insulation.

Multiwrap forms part of the Mulcol® Penetration Seal System.

Advantages

- ✓ Fire resistance ≤ 240 minutes
- ✓ CE-certified
- ✓ Environmentally and user-friendly
- ✓ Quick and easy application
- ✓ Ideal for hard-to-reach locations
- ✓ Halogen-free
- ✓ Working life of 25 years

Application

- ✓ CLT (wood) and rigid floors
- ✓ CLT (wood) and rigid walls
- ✓ Flexible walls
- ✓ In combination with Multimortar and Multimastic FB fireboards
- ✓ Plastic pipes with a diameter of up to Ø 160 mm
- ✓ Metal pipes with combustible insulation

Technical data

Colour	Anthracite
Application temperature	0 °C tot +50 °C
Temperature resistance	0 °C tot +80 °C
Reaction to fire	Class C-s1, d0 in accordance with EN 13501-1

Packaging

	Dimensions	Box	Outer box	Pallet	Article number
Roll	10000 x 50 x 1,8 mm	1 piece	8 pieces	480 pieces	207001050



Technical documents available

- ✓ Product Data Sheet (PDS)
- ✓ Technical Data Sheet (TDS)
- ✓ Safety Data Sheet (SDS)
- ✓ Installation Manual
- ✓ CE certificate

Approvals

- ✓ Tested in accordance with EN 1366-3
- ✓ Classification in accordance with EN 13501-2
- ✓ Certified in accordance with EAD 350454-00-1104
- ✓ Tested in accordance with NEN 6075 (Smoke-resistance)
- ✓ ETA report 23/0054
- ✓ Declaration of Performance (DoP)

The above documents are available from your Mulcol contact or via www.mulcol.com

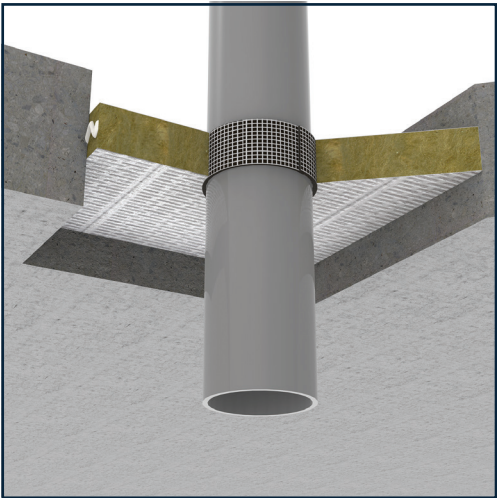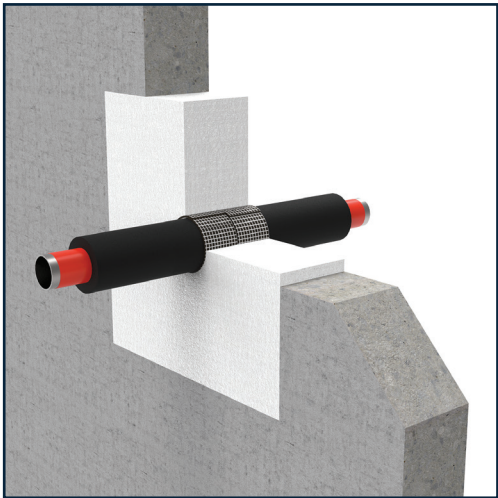

Multivrap-PDS-GB | v4 | 11/2024 | Mulcol International | Promenade 75 | 5041 GM | Uden | The Netherlands



Mulcol International BV has compiled the technical data of this sheet with the utmost care and reserves the right to change product properties without prior notice. The user of this data remains responsible at all times for its correct application. In case of ambiguities or doubts, we advise you to consult with Mulcol International BV to ascertain whether this data meets the required application.

